




# WINDOWS AND DOORS FOR BOATS AND SMALL SHIPS

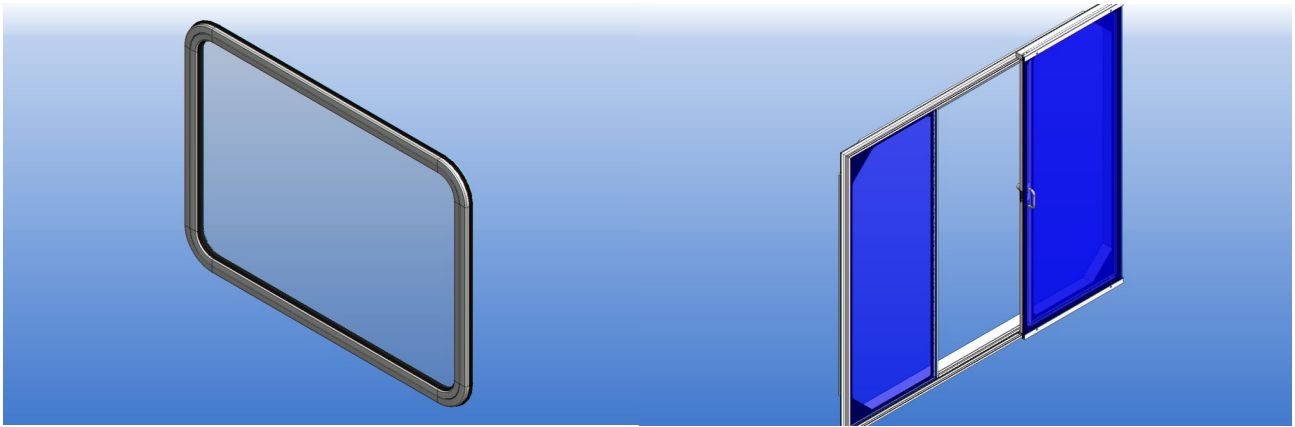

## WINDOWS

SIDE SHELL THICKNESS FROM 3 TO 20 mm  
OPENING WITH STRAIGHT OR ROUND CORNERS  
MIN. CORNER RADIUS 35 mm

### FRAME:

- HAND POLISHED, ANODIZED (AND POWDER PAINTED)
- MARINE ALUMINUM PROFILES

### GLASS:

- TOUGHENED
- CLEAR, FROSTED OR SMOKED
- THICKNESS 4, 5, 6 OR 8 mm

BLACK RUBBER SEALS

MOUNTING WITHOUT ANY HOLES TO SIDE SHELL

### FIXED TYPES:

- SINGLE OR DOUBLE GLASS

### OPENABLE TYPES:

- SINGLE OR DOUBLE GLASS
- HINGED FROM TOP OR SIDE

## DOORS

SIDE SHELL THICKNESS FROM 3 TO 20 mm  
OPENING WITH STRAIGHT OR ROUND CORNERS

### FRAME AND DOOR FRAME:

- HAND POLISHED, ANODIZED (AND POWDER PAINTED)
- MARINE ALUMINUM PROFILES

### GLASS:

- TOUGHENED
- CLEAR, FROSTED OR SMOKED
- THICKNESS 6, 8 OR 10 mm

BLACK RUBBER SEALS

MOUNTING WITHOUT ANY HOLES TO SIDE SHELL

### TYPES:

- SINGLE OR DOUBLE GLASS
- HINGED OR SLIDING
- WEATHER OR WATER TIGHT
- WITH OR WITHOUT DOOR GLASS
- HINGED AND SLIDING HATCHES



**LSK-Project Oy**  
Pyhällöntie 6,  
21430 YLISKULMA, FINLAND

Phone +358 40 502 9906  
Email [info@lsk-project.fi](mailto:info@lsk-project.fi)  
[www.lsk-project.fi](http://www.lsk-project.fi)

